

# ITALPROFIL®


Materiali e tecnologie per coperture impermeabili

la  
soluzione **autolivellante**

per qualsiasi tipo

di pavimentazione galleggiante

the  
adjustable solution  
ideal for any type  
of suspended deck roofing

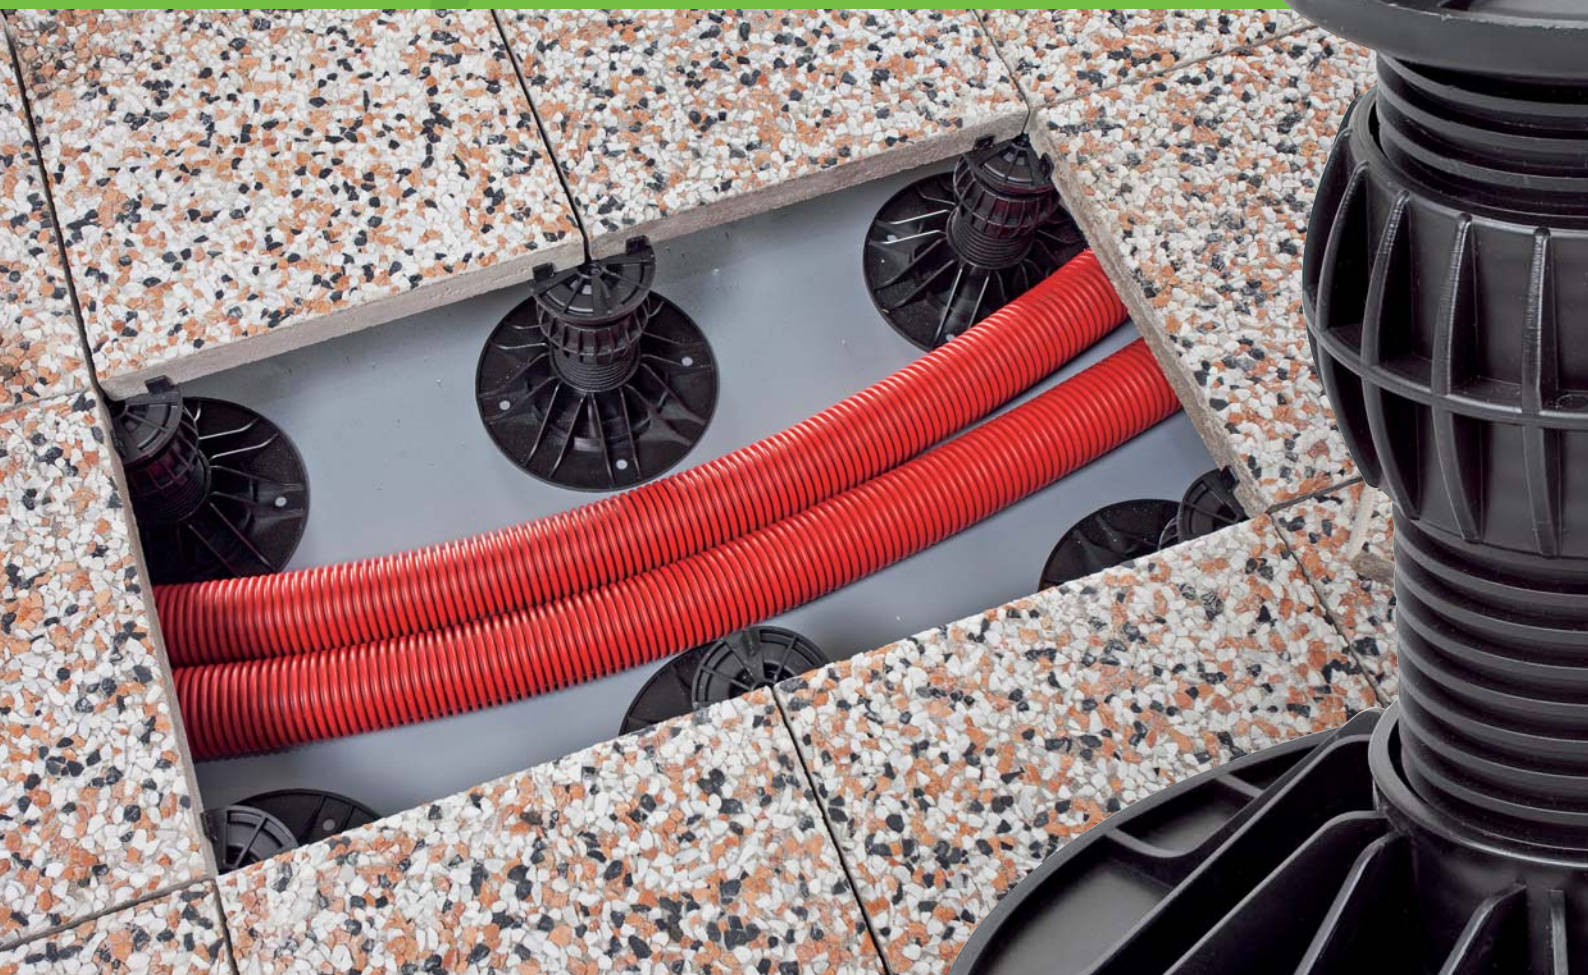

ADJUSTABLE  
PAVING  
SUPPORT

**BASAMENTO  
REGOLABILE**

Roofing accessories and technology



## BASAMENTO REGOLABILE

Il basamento regolabile della Italprofili® si presta con estrema facilità e con la massima sicurezza a rendere praticabili le superfici impermeabilizzate e non anche in presenza di cavi o tubi passanti, senza bisogno di interventi alla struttura, facilita il passaggio dell'acqua, l'eliminazione dell'umidità e consente sempre una facile e rapida ispezionabilità delle superfici sottostanti.

Si adatta a qualsiasi tipo di pavimentazione galleggiante (piastre prefabbricate, legno, legno composito, etc.).

## CARATTERISTICHE

Altezza regolabile	da 35 a 200 mm.
Terminale autolivellante	da 0 a 5%
Materia prima utilizzata	PP Resistente agli agenti chimici e atmosferici e riciclabile
Temperature di esercizio	-30°C + 120°C
Portata certificata	

## ADJUSTABLE PAVING SUPPORT

Italprofili® adjustable paving support system is based on a serious of adjustable modular paving supports that simply and safely adapt to all kinds of surface and floor, with the potential of large cavities beneath the slab. Pipes and cables can be stored beneath allowing easy access allowing for effective drainage between and beneath. Allow ready access to the waterproofing membrane and eliminate the possibility of efflorescence and algae associated with pavers embedded in sand and sand/cement screeds. They can be used in a large number of roofing types, including concrete slab, real stone paving and timber decking.

## CHARACTERISTICS

Height range	from 35 to 200 mm.
Slope compensation	from 0 to 5%
Material Polypropylene	good anti UV chemical alkalis resistance, recyclable
Working range	-30°C + 120°C
Certified compression properties	

■ Art. 66.3



■ Art. 66 - 66.1



■ Art. 66.2



■ Art. 66.4



■ Art. 66.5



■ Art. 66

h. regolabile da 35 a 55 mm.  
h. from 35 to 55 mm.

■ Art. 66.1

h. regolabile da 55 a 70 mm.  
h. from 55 to 70 mm.

■ Art. 66.2

h. regolabile da 70 a 110 mm.  
h. from 70 to 110 mm.

■ Art. 66.3

h. regolabile da 110 a 150 mm.  
h. from 110 to 150 mm.

■ Art. 66.4

h. regolabile da 150 a 170 mm.  
h. from 150 to 170 mm.

■ Art. 66.5

h. regolabile da 170 a 200 mm.  
h. from 170 to 200 mm.



Complete range [www.italprofili.com](http://www.italprofili.com)

Tutta la gamma dei prodotti su [www.italprofili.com](http://www.italprofili.com)

skriba - san donà di piave - 0421 220792 - 2.000 - 06/2009



ITALPROFILI®